

# **The Enigma<sup>®</sup>**

## **FP2120 Series**




# **SPECIFICATION SHEET**



*Product Specifications subject to change*

# The Enigma<sup>®</sup> Fan Assembly – FP2120\*\*

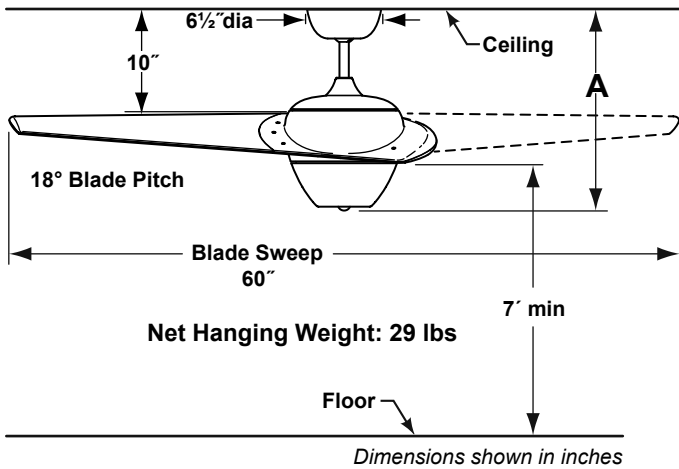

Available Finishes	
MG	Metro Gray

*\*\*Custom Finishes are available by special order only. Contact tech support for more information*

Fan Assembly	A
Fan w/6" downrod	18 1/2"
Fan w/12" downrod	24 1/2"
Fan w/18" downrod	30 1/2"
Fan w/24" downrod	36 1/2"
Fan w/36" downrod	48 1/2"
Fan w/48" downrod	60 1/2"
Fan w/60" downrod	72 1/2"
Fan w/72" downrod	84 1/2"

## INSTALLATION REQUIREMENTS:

Ceiling fan is to be secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 100 pounds. A lag bolt must pass through the junction box and into the wood member above.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 3-speed, non-reversing. (220 VAC, 50 Hz export version available)

**Fan Speeds:** Low - 60 rpm, Med - 120 rpm, High - 180 rpm

## CONTROL OPTIONS:

The hand-held remote control (C4T) and canopy-style receiver (RECAN34) are included. This is a pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate speeds, down light controls, and off button. Installation and operating instructions provided with each control.

## LIGHTING OPTION:

Single, built-in downlight socket, bulb not included, use only PAR 30 short-neck Halogen Bulb with a maximum of 100 watts.

## DOWN ROD OPTIONS:

The Enigma<sup>®</sup> fan comes with a 1" Dia. x 6" (DR1-6) down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". The Enigma<sup>®</sup> fan can be mounted on a sloped ceiling up to \*30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information

## DAMP LOCATION:

Fan not rated for Damp Location usage.

*Minimum Pole Lengths for Sloped Ceilings		
Degrees / Pitch	Minimum Pole Length	Blade Tip to Ceiling Dimension
18° / 4 - 12 pitch	12" (DR1-12_)	6 1/2"
27° - 30° / 6 - 12 to 7 - 12	18" (DR1-18_)	4 1/2"



**10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113  
Visit Our Website [www.fanimation.com](http://www.fanimation.com)**

